



**EZYFit™ Knockdown Solutions by TMI are designed and manufactured with the same high-quality enclosure construction and components as our factory-assembled custom air handling units. The difference is we flat pack and ship them for field assembly with detailed instructions and on-site supervision - Saving you time and money on your next commercial Air Handling project.**



EZYFit™ Knockdown unit packed for shipment

**If you can imagine the problem we can design your solution.**

**Each EZYFit™ Knockdown Solution is engineered to meet your specific requirements for:**

- Total Environmental Quality
- Current or anticipated load
- Energy efficient operation
- Ease of installation and service
- Long-term dependability

### **Design Flexibility**

TMI Climate Solutions frequently design into projects that require carefully configured units built around angles, grades, turns, and other complex dimensions to realize a specific project's needs.

Selecting an EZYFit™ Knockdown Solution will optimize your available space by integrating the existing structural columns, beams, or obstacles into

your AHU design. Our lightweight EZYFit™ Knockdown panels and components are easily transported through doorways, hallways and elevators making for a quick assembly and reduced field costs.

EZYFit™ Knockdown unit completed assembly



## Benefits of EZYFit™ Knockdown vs. Standard construction:

- Minimal facility disruption or downtime
- No required building modification
- Maximized current space
- Design flexibility can accommodate structural constraints
- Simple assembly and installation with on-site supervision



Completed Unit  
Interior view

**Lightweight EZYFit™ Knockdown Solutions are ideal for Retrofit applications or installations in limited, or “difficult to get to” spaces.**

**EZYFit™ Knockdown Solutions can utilize any of TMI’s current panel styles such as:**

Non-Thermal Break, Gasketed Thermal Break, or No Thru Metal

- 2” fiberglass insulation\*
- 2” foam insulation\*
- 3” foam insulation
- 4” fiberglass insulation\*
- 4” foam insulation

\* (not available in “no thru metal”)


For additional information please refer to the panel construction brochure.

EZYFit™ Knockdown unit  
packed for shipment



### EZYFit™ Knockdown Delivery

- All panels and components manufactured at a size, shape, and weight based on filed conditions.
- Units delivered flat-packed, shrink wrapped, and clearly labeled for organized installation.
- Comprehensive and easy to read assembly and installation information with 3D drawings.
- Installation supervision and field testing available.

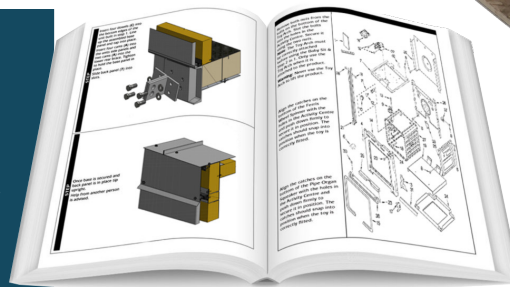


### Utilize TMI’s other Retrofit products in your Knockdown Solution


Fan Array



Back Flow Preventor



TMI AFA100 or AFA1000



TMI FAO



## TMI Climate Solutions

Headquarters: 200 Quality Way • Holly, MI 48442 • P:888-727-8722 • F:810-694-5804  
TMI Climate Solutions Canada: 117 Hymus Boulevard • Point-Claire QC H9R 1E5 • P:514-426-8642

[TMICLIMATESOLUTIONS.COM](http://TMICLIMATESOLUTIONS.COM)