

Overview

Specifically designed for the HVAC industry TMI EZY Access Doors ensure an air & water tight seal.




Our low leak double-wall doors are built using a No-thru metal design and are available in 2", 3" & 4" thickness. Mounted on an aluminum extrusion frame. All EZY Access Doors are made to order to suit your exact build.

Perimeter Frame Construction

Fabricated of high strength 6063-T6 aluminum extrusions the frame is assembled using a polyamide thermal break creating a true No-thru metal construction.

Door Construction

EZY Access Doors are available in 2", 3" & 4" thickness and offer R-values of 13, 20 & 26 respectively. Our doors are constructed using high density injected foam with class 1 foam per ASTM E84 optional. Our standard EZY Access Doors are No-thru metal reducing the risk of condensation occurring even in the harshest conditions. We offer several material choices galvanized G90, smooth or stucco aluminum, and stainless steel for the door's inner and outer skins. Any of these options can be painted to match the unit's exterior.

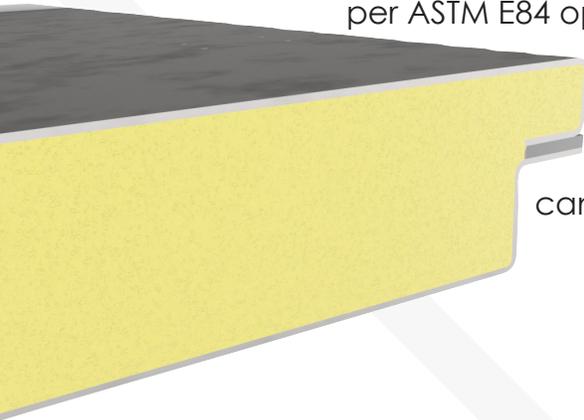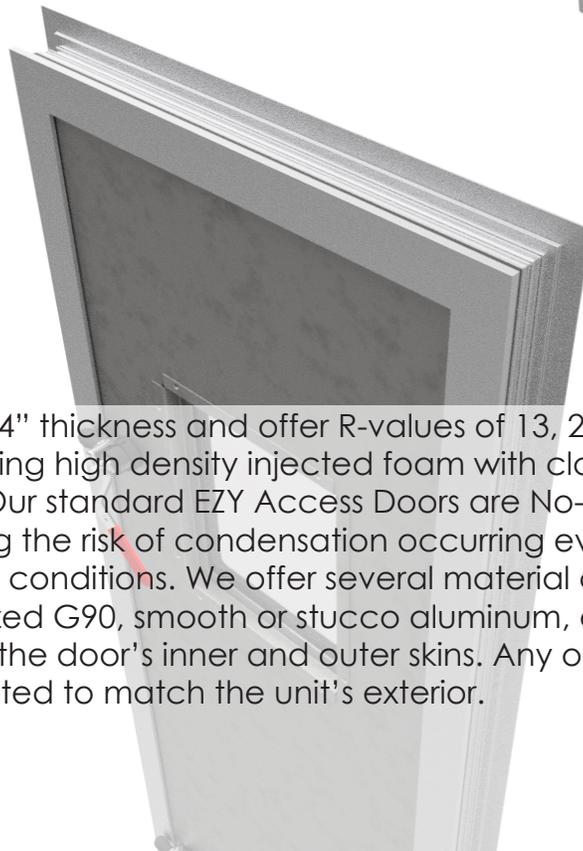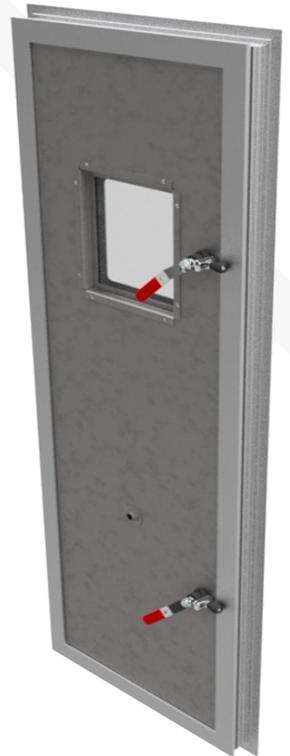

EZY Access Door Features



Hinges

EZY Access Doors come standard with 3-axis adjustable hinges that allow for easy door adjustments in the field. The hinges are die-cast zinc and powder coated in black to provide a nice finish and excellent weather resistance.



Handles

Our handles are made of glass-fiber reinforced polyamide and are offered in different locking options. For optimum safety our handle sets come standard with an inside security handle. The roller cams are adjustable to insure smooth closing and proper gasket compression. Additional options such as multi-point rod linkage are available.



Windows

Windows are available as an option and are made with thermal pane tempered safety glass. The window is offered with a 10"x12" viewing area. A smaller viewing area of 6"x12" can be offered for smaller doors.



Gasket

Our gasket is made of an EPDM rubber and all our doors are double gasketed to ensure an airtight and watertight seal.

Storm door chain

Our out-swing doors come standard with storm door chains to protect doors from damage in high wind conditions.

Our doors can come with many of options such as test ports and tie backs; please contact a TMI representative for more info.

If you are interested in learning more about TMI Climate Solutions **EZY ACCESS Doors** and options please contact your local TMI Rep or contact us directly at:

TMI Climate Solutions

Headquarters: 200 Quality Way • Holly, MI 48442 • P:888-727-8722 • F:810-694-5804

TMI Climate Solutions Canada: 117 Hymus Boulevard • Point-Claire QC H9R 1E5 • P:514-426-8642

TMICLIMATESOLUTIONS.COM